

WHITE FEET TILE[®]

ISO 9001:2015

The Cool Roof Tiles Expert...



WHITE FEET - COOL ROOF TILES


HEAT RESISTANT | WATER PROOF | ANTI-SKID | WASH PROOF

LIGHT WEIGHT | LOW COST | SAVES ELECTRICITY

WHITE FEET TILE[®]

The Cool Roof Tiles Expert...

“ ENGAGE THE EVEREST
ON TOP OF YOUR
ROOF AND TERRACE ”

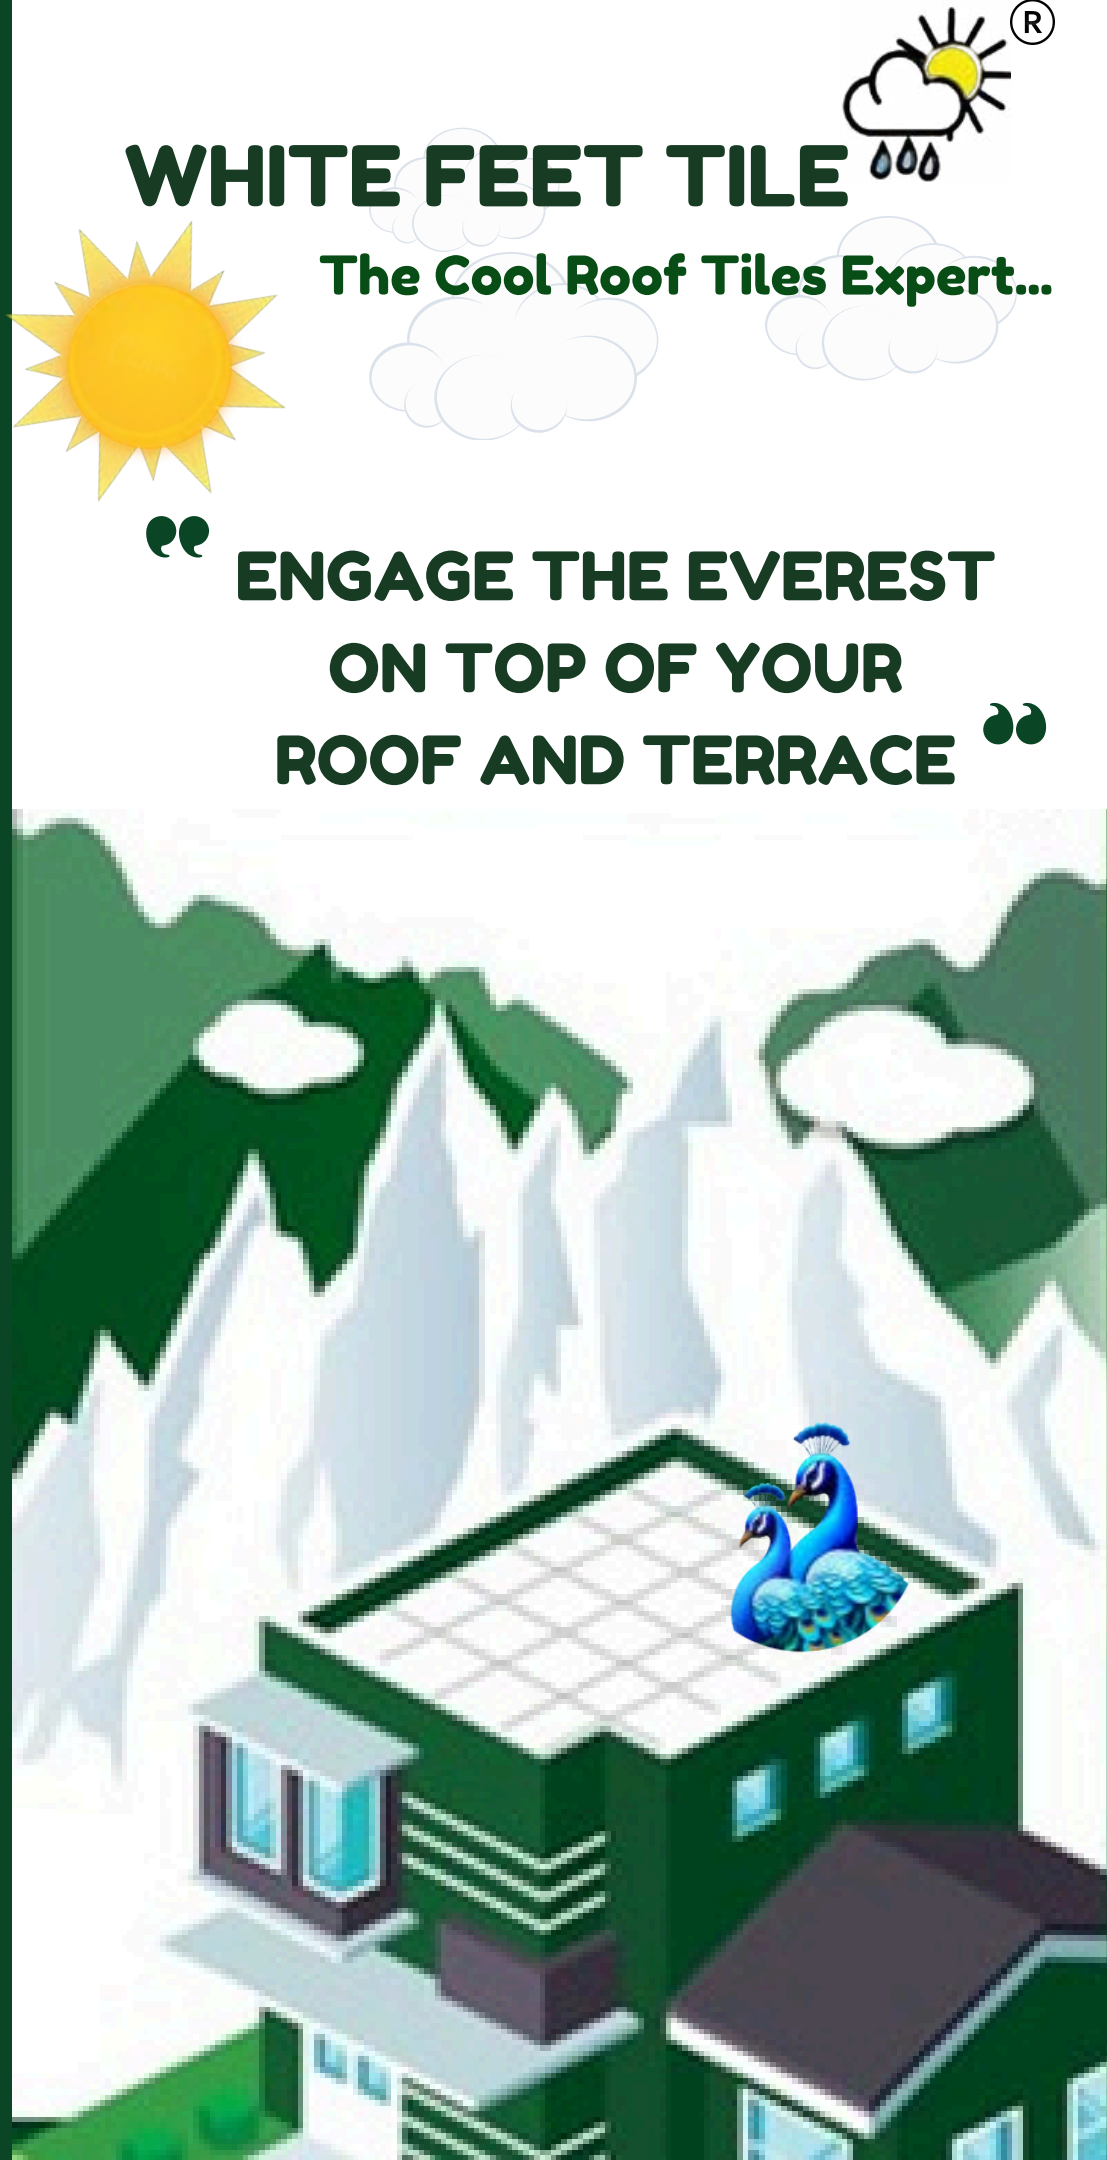

WHITE FEET - COOL ROOF TILES

About Us

White Feet Tile Industry established in the year 2013 and became the renowned manufacturers of Cool Roof Tiles in the tiles industry, our products are best in quality and price.

We are having well qualified professionals with well maintained factory space to make the product well. We are also having our own Transport facility for on time delivery of material for hassle free site laying works.

MISSION

“ We Continuously Support The Eco Friendly Environment in The World by Our Products “

VISION

“ We create Products Which Makes Development in the Tiles Industry and Improvement To Society “

Advantages

- ◆ Protect building From Thermal Impact
- ◆ No need to put Weathering Course
- ◆ Less usage of Fans / Air Conditioner
- ◆ Cost Effective
- ◆ High Durability
- ◆ Easy Maintenance
- ◆ Anti-Skid, Water Resistant
- ◆ 100% Washable
- ◆ Non Ceramic material
- ◆ User friendly
- ◆ Good Anti-fungal Property
- ◆ Good Abrasion Resistance
- ◆ Semi Gloss Surface



WHITE FEET TILE



Our Products

Model : Silver Plus

254mm X 254mm X 15mm



<https://whitefeettile.in>



Protect from thermal impact



No need of weathering course



Water Resistance

Model : Mx-Prime

254mm X 254mm X 18mm



<https://whitefeettile.in>



Protect from thermal impact



No need of weathering course



Water Resistance



WHITE FEET TILE



Model : Elite silver

300mm X 300mm X 20mm



<https://whitefeettile.in>



Protect from thermal impact



No need of weathering course



Water Resistance

Model : Elite Gold

300mm X 300mm X 20mm



<https://whitefeettile.in>



Protect from thermal impact



No need of weathering course



Water Resistance



WHITE FEET TILE

Model : Parking Tile

356mm X 356mm X 25mm



Faimi
Silver Grey & Dark Grey

Features of Parking Tiles :

- Durability
- Slip Resistance
- Stain Resistance
- Weather Resistance
- Low Maintenance
- Design Options
- Strength

Model : Paver Block

60mm Thickness



Zik Zak 60mm

One of the significant advantages of block paving is its durability - it can withstand weather changes and heavy traffic.

Additionally, a well-laid block-paving surface need not be prone to weeds like traditional pavement or tarmac



WHITE FEET TILE



White Feet Grout

Weight 10 Kg



<https://whitefeettile.in>

White feet sanded grout is made of blended portland cement, graded aggregates, fortifiers and pigments, it provides a tile joint that is strong, hard, durable and colourfast.

White Feet Grout admix

250 ml



<https://whitefeettile.in>

Grout Admix is specially designed latex admix to be used with sanded & unsanded grout.

Mixing Ratio:

Use approximately 2 to 2.25 litres of water mixed with 250ml admix for 10kg Rough Grout.



WHITE FEET TILE

TESTIMONIALS

OMEGA INSPECTION & ANALYTICAL LABORATORY
ISO / IEC : 17025 : 2005 Accredited by NABL, Dept. of Science & Technology, Govt. of India
T.S. No. 57 & 58, Gundry Industrial Estate, Gundry, Chennai - 600 032, INDIA. Phone : 044 - 2250 0127
Telefax : 044 - 2250 0523, Mobile : 94442 55041, E-mail : omega_lab@outlook.com Web : www.omegalab.in

TOCR NO: 19-61381
TR.No.01- 15279 - 1

Test Report
On Roofing Tiles

To:
M/s. White Feet Tile Industry
No.350/1, Kandrathur Main Road,
Korur, Chennai - 600 123.

Source of sample : Sample drawn by the customer
Customer Reference : No.NIL, Dtd.18.01.19
Project : Not Fulfilled
Make : White Feet - Silver Plus (255 x 295 x 10mm)
No. of Samples Tested : 3 Nos
Period of test : 28.01.19 to 23.01.19
Technical Reference : ASTM E 1980 & IS: 15622 -2006

Sl. No	Tested Parameters	Results		
		Low-Wind	Medium-Wind	High-Wind
1.	Solar Reflectance Index (SRI)	87	93	90

* As furnished by the customer

Results: All measurements were conducted at 72±3°F and 50±5%RH.

Notes: 1- Reflectance measurements were conducted using a Devices and Services S8R-ER Version 6.4 Reflectometer operated in v5 simulation mode and calibrated with Devices and Services Reference Tile # D-18.
2- Emittance measurements were conducted using a Devices and Services Emissionometer Model AE calibrated with Devices and Services Reference Standards: High Emittance: 0.90 and Low Emittance: 0.06. Thermal emittance measurement for sample was modified in accordance with Devices and Services Company's Tech Note 04-E.
3- SRI calculations per ASTM E 1980 utilize the following assumptions: Low-Wind h = 3 W/m²-K, Medium-Wind h = 12 W/m²-K, and High-Wind h = 30 W/m²-K.

For Omega Inspection & Analytical Laboratory
(K.M. Balasubramanian)
Chief Executive Officer

Tested/Verified

Note: I certify that the test measurements shown herein were obtained and are consistent with the following procedures and reference specifications.
The Certificate is valid only for the particular samples submitted for test. Sample destruction is not certified in all cases and is given as described by customer. All sample destruction should be accompanied by a written request within 15 days from the date of issue of this report. The report shall be reprinted upon request in full, without the written approval of OIA.

Silver Plus Test Report

OMEGA INSPECTION & ANALYTICAL LABORATORY
ISO / IEC : 17025 : 2005 Accredited by NABL, Dept. of Science & Technology, Govt. of India
T.S. No. 57 & 58, Gundry Industrial Estate, Gundry, Chennai - 600 032, INDIA. Phone : 044 - 2250 0127
Telefax : 044 - 2250 0523, Mobile : 94442 55041, E-mail : omega_lab@outlook.com Web : www.omegalab.in

TOCR NO: 19-6139
TR.No.01- 14644

Test Report
On Roofing Tiles

To:
M/s. White Feet Tile Industry
No.350/1, Kandrathur Main Road,
Korur, Chennai - 600 122.

Source of sample : Sample drawn by the customer
Customer Reference : No.NIL, Dtd.02.01.19
Project : Not Fulfilled
Make : White Feet Gold (255 x 295 x 10mm)
No. of Samples Tested : 3 Nos
Period of test : 02.01.19 to 09.01.19
Technical Reference : ASTM E 1980 & IS: 15622 -2006

Sl. No	Tested Parameters	Results		
		Low-Wind	Medium-Wind	High-Wind
1.	Solar Reflectance Index (SRI)	89	91	90

* As furnished by the customer

Results: All measurements were conducted at 72±3°F and 50±5%RH.

Notes: 1- Reflectance measurements were conducted using a Devices and Services S8R-ER Version 6.4 Reflectometer operated in v5 simulation mode and calibrated with Devices and Services Reference Tile # D-18.
2- Emittance measurements were conducted using a Devices and Services Emissionometer Model AE calibrated with Devices and Services Reference Standards: High Emittance: 0.90 and Low Emittance: 0.06. Thermal emittance measurement for sample was modified in accordance with Devices and Services Company's Tech Note 04-E.
3- SRI calculations per ASTM E 1980 utilize the following assumptions: Low-Wind h = 3 W/m²-K, Medium-Wind h = 12 W/m²-K, and High-Wind h = 30 W/m²-K.

For Omega Inspection & Analytical Laboratory
(K.M. Balasubramanian)
Chief Executive Officer

Tested/Verified

Note: I certify that the test measurements shown herein were obtained and are consistent with the following procedures and reference specifications.
The Certificate is valid only for the particular samples submitted for test. Sample destruction is not certified in all cases and is given as described by customer. All sample destruction should be accompanied by a written request within 15 days from the date of issue of this report. The report shall be reprinted upon request in full, without the written approval of OIA.

Gold Test Report



TESTIMONIALS

OMEGA INSPECTION & ANALYTICAL LABORATORY

Instrum
Customer
PUNJAB POLYMERIZATION LTD., WAREHOUSE NO. 10A, OPP. SBI, D.I.D. ROAD, JALANDHAR, PUNJ.
CIN: UGAC00001, PIN: 150010, POST BOX: 200001, MOBILE: 98150 10101, FAX: 98150 10102.

T.S. No.: 35.36 & 37.58 Gundy Industrial Estate, Gundy, Chennai 600 932, INDIA. Phone : 044 2250 0127
Tel/Fax : 044 - 2250 0523, Mobile : 98442 55041, E-mail : omega_lab@yahoo.com Web : www.omega-lab.in

TCR No.: 20-1262
TR No.: 20-1450 A

Test Report

On Roofing Tiles

Date: 16.09.2020

To:
**Mrs. White Feet Tile Industry
No.25B/1, Kandratrav Main Road,
Kovur, Chennai - 600 122.**

Name of sample
Customer Reference *
Project *
Make *
No of Samples Tested
Period of test
Technical Reference

Sample drawn by the customer
No./Dt, End 09/09/2020
Not Furnished
Elite - Silver (300 x 300 x 20mm)
3 Nos
16.09.20 to 16.09.20
ASTM E 1980 & IS: 15622 -2006

Sl. No	Tested Parameters	Results		
		Low-Wind	Medium-Wind	High-Wind
1.	Solar Reflectance Index (SRI)	80	92	94

* As furnished by the customer

Result: All measurements were conducted at T2+TFF and H=1768KL.

Note(s): 1- Reflectance measurements were conducted using a Devices and Services SSR-ER Version 6.4 Reflectorimeter operated in v5 emulation mode and calibrated with Devices and Services Reference Tile JD-IL.

2- Emittance measurements were conducted using a Devices and Services Emisometer Model AE calibrated with Devices and Services Reference Standards. High Emittance: 0.90 and Low Emittance: 0.06. Thermal emittance measurement for sample was modified in accordance with Devices and Services Company's Tech Note 94-1.

3- SRI calculations per ASTM E 1980 utilizing the following assumptions: Low-Wind h = 3 W/m K, Medium-Wind h = 12 W/m K, and High-Wind h = 30 W/m K.

Tested / Verified

Omega Inspection & Analytical Laboratory

(Signature)
Chief Executive Officer

Note: Certificate has been generated after have been checked and its compliance with standard testing methods and reference specifications. This certificate is free PDF & as the generate condition authorized by our Sample destruction form included in all report is given as described in appendix. All customers must this agreement is recommended in writing within 10 days from the date of issue of this report. The request shall be registered upon or received by email or otherwise by e-mail.


Elite Silver Test Report



WHITE FEET TILE



ISO CERTIFICATE

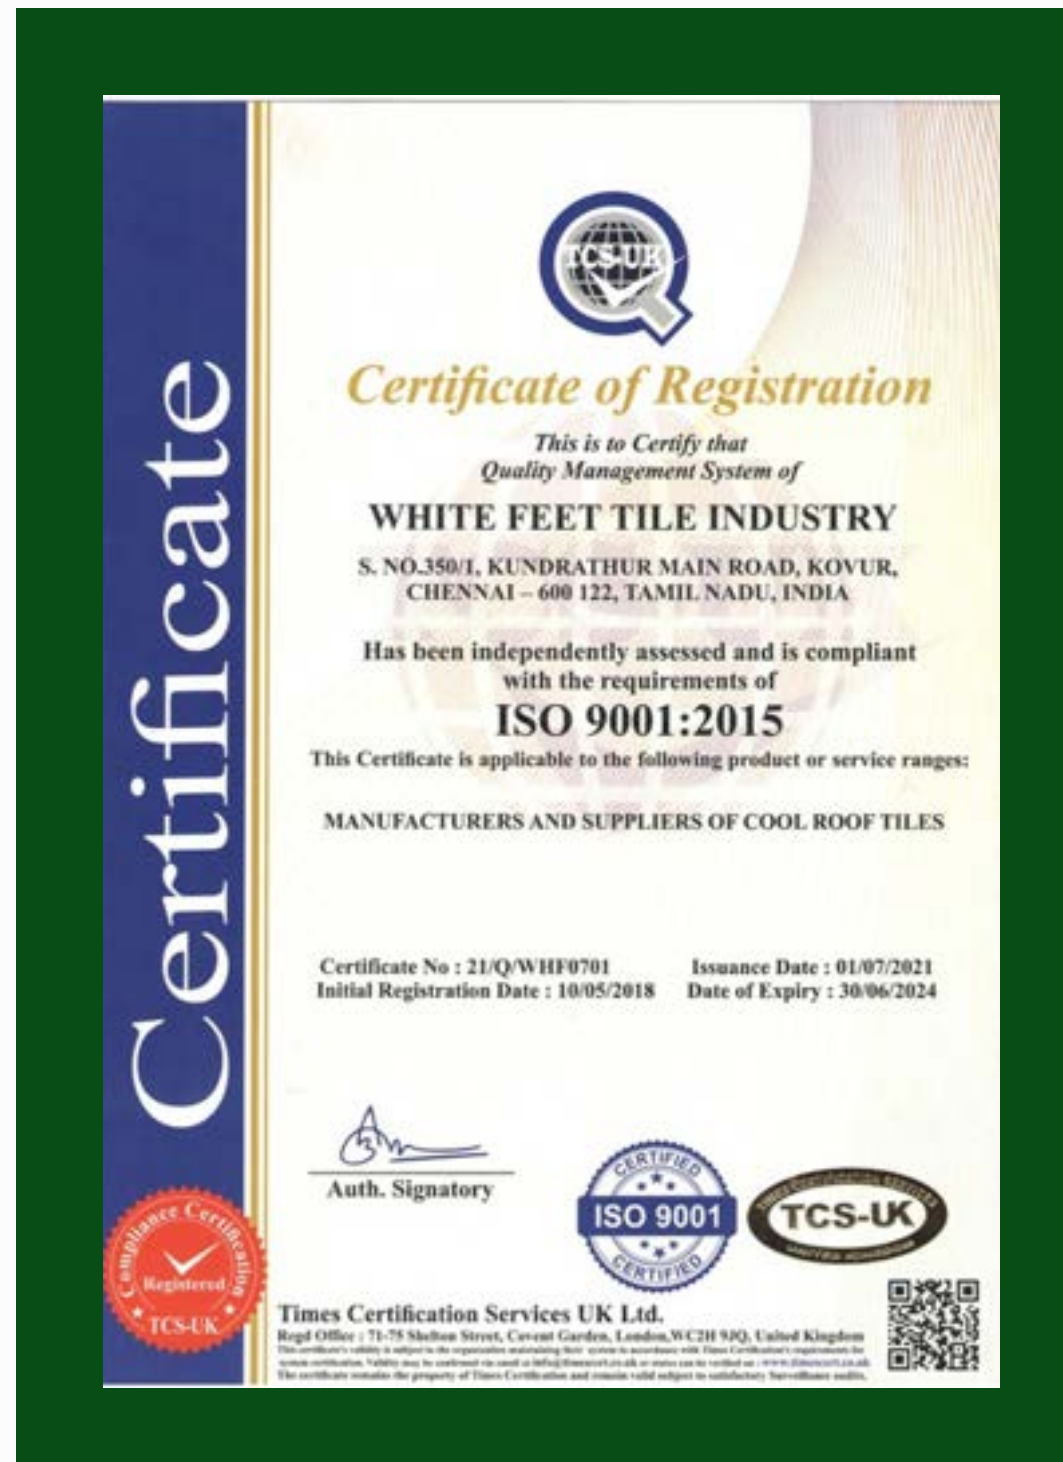



WHITE FEET TILE

Comparison Chart

	Silver plus	Elite Silver	Mx-Prime	Elite Gold
Size	254mm X 254mm X 15mm	300mm X 300mm X 20mm	254mm X 254mm X 18mm	300mm X 300mm X 20mm
Color	Top White Bottom Grey	Top White Bottom Grey	Full White	Full White
Model Highlight	Top 7mm Cooling Minerals Balance 8mm Concrete	Top 10mm Cooling Minerals Balance 10mm Concrete	18mm Full Cooling Minerals	20mm Full Cooling Minerals
Area Coverage	0.69 sqft	1.00 sqft	0.69 sqft	1.00 sqft
Weight	2 Kg Per Tile	4 Kg Per Tile	2.25 Kg Per Tile	4 Kg Per Tile
Water Obsorption	3.58 % (Not more than 10%)	3 % (Not more than 10%)	3.02 % (Not more than 10%)	2.55 % (Not more than 10%)
Solar Reflective Index (SRI) Value	89 (Medium Wind)	92 (Medium Wind)	91 (Medium Wind)	95 (Medium Wind)



WHITE FEET TILE

PACKING SYSTEM





WHITE FEET TILE

SITE GALLERY



Laying Instructions for Cool Roof Tiles

- 1) Prepare base mortar with cement and sand in the ratio 1:4 along with waterproofing chemical.
- 2) The total mortar thickness should not be more than 25mm.
- 3) Keep the hand mixer ready to apply to avoid uneven surface, while laying the tile.
- 4) Prepare cement slurry as thick paste to spread on the mortar.
- 5) Use 6mm spacer in between tiles.
- 6) Do not use hammer for laying.
- 7) Fill the joints with white cement, sand and water proofing chemical or use suitable water proofing grouting Materials.
- 8) Do not use the layed area for 48 hours.

Google
Reviews
Customer Rating



WHITE FEET TILE

ISO 9001:2015

The Cool Roof Tiles Expert...

Factory/ Office :

No:350/ 1, Kundrathur Main Road,
Kovur, Chennai-600122



whitefeettile@gmail.com




www.whitefeettile.in,
www.whitefeet.in



[@WhiteFeetCoolRoofTiles](https://www.youtube.com/@WhiteFeetCoolRoofTiles)



facebook.com/CoolRoofTiles/



instagram.com/cool_roof_tiles/

CONTACT: +91 98845-20001